

SECTION CC
6 IN = 1 FT.

SECTION DD
FULL SIZE



FIG. 5
SHOCK CORD COVER INSTALLATION
3 IN = 1 FT.


FRONT EDGE OF BAGGAGE COMPARTMENT LID
PLACARD SHOULD BE READABLE WHEN BAGGAGE COMPARTMENT IS OPEN
.082 HOLE *4 PK. SCREW 2 REQ.
B5411

FIG. 1
SERIAL NUMBER PLACARD INSTALLATION
3 IN = 1 FT.



FIG. 9
REAR SEAT BACK CUSHION INST.
FULL SIZE



FIG. 8
REAR SEAT BOTTOM CUSHION INST.
FULL SIZE



FIG. 7
FRONT SEAT BOTTOM CUSHION INST.
FULL SIZE



SECTION B-B
FULL SIZE

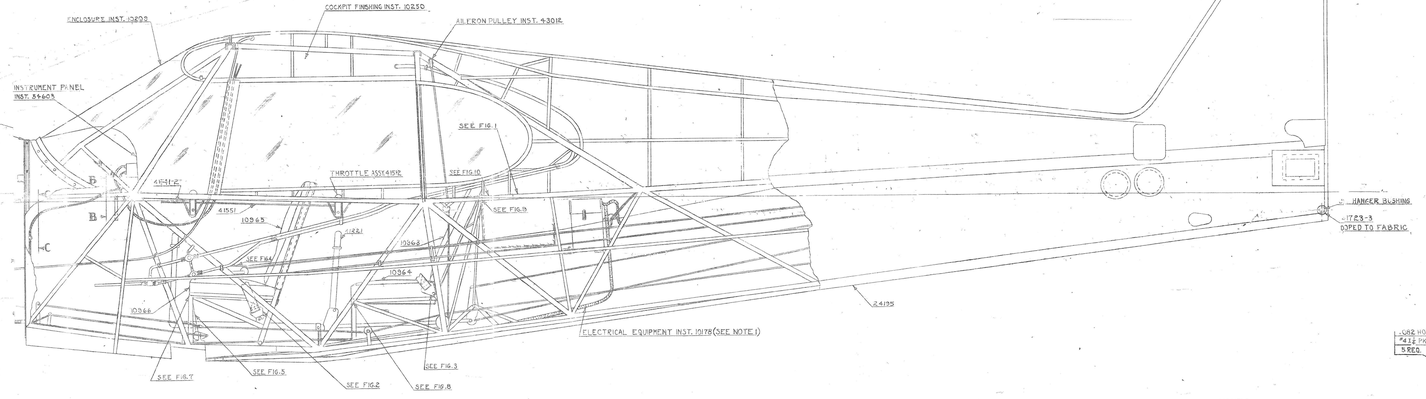



FIG. 10
CARD HOLDER INST.
4 IN = 1 FT.



FIG. 2
FRONT SEAT SAFETY BELT ATTACH.
FULL SIZE



FIG. 3
REAR SEAT SAFETY BELT ATTACH.
FULL SIZE



FIG. 11
COWL WEBBING INST.
1 IN = 1 FT.



SECTION A-A

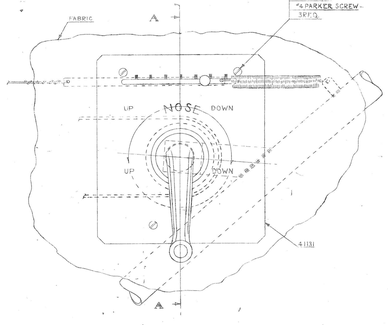

FIG. 4
STABILIZER ADJUSTMENT CONTROL INST.
FULL SIZE

NOTE:
1. FOR ELECTRICAL SYSTEM PARTS NECESSARY TO COMPLETE THIS ASSEMBLY SEE BILL OF MATERIAL.
2. WHERE "SEE NOTE 2" IS INDICATED ELASTIC STOP NUTS (TYPE EZNUT 428) AND UNDRILLED BOLTS MAY BE USED.

	1	CLIP (OR PURCH'AIR ASSOCIATES OR P.E. COWLING SAFETY PIN PURCH'AIR ASSOCIATES)
10338	1	CARD HOLDER
B3891-6 B3891-7	2 1	WEBBING
	2	FUSE *BA030 (PURCH.)
	1	STRIKE PURCH. WESTCOTT
	1	STRIKE (LOCKING-OR EQUIV.
	1	BATTERY *BA24 (BUY READING STORAGE BATTERY CO.
*10-32	3	ELASTIC STOP NUT (LOCK)
*10-32	3	90° FLUSH SCREW (COUNTERSUNK)
AN935-10	3	LOCK WASHER
*8-32	6	100° FLUSH SCREW (COUNTERSUNK)
*8-32	4	1/4 TRUSS HEAD MACHINE SCREW
*6-32	2	*10851 (SILICIE PLATED) HEX NUT
*6-40	2	
*4-40	2	90° FLUSH SCREW (COUNTERSUNK)
AN935-4	2	LOCK WASHER
AN935-4	2	
*8	5	100° TYPE 2 STOVE PIPE SCREW
*6	2	100° TYPE 2 STOVE PIPE SCREW
AN960-416	2	WASHER
AN960-10	8	
AN6-5	1	BOLT
AN380-2-2	1	COTTER PIN
AN310-6	1	NUT
B4006-M	1	PIN
B5161-5	1	TUBE
10032-33	4	CLAMP
63571	1	BRACKET ASSY.
10333	1	SWITCH PANEL ASSY.
10327	2	ADAPTER PLATE
10326	1	ADAPTER PLATE
11115	1	RADIO INST.
10421	1	BATTERY BOX ASSY.
10379	1	BATTERY ACCESS DOOR
10267		WIRING DIAGRAM
10183	1	TERMINAL STRIP ASSY.
10193	1	GROUND ASSY.
10152	1	CABLE ASSY.
10169	1	BATTERY BOX COVER ASSY.
10681-3	1	WIRE ASSY.
10682-8	1	WIRE ASSY.
10178	1	ELECTRICAL EQUIPMENT INST.
	1	REAR BELT ASSY. B8843 (PURCH.
	1	FRONT BELT ASSY. B8842 (RUSSELL PEPPER
	1	ELASTIC STOP NUT *6216-6
	1	ELASTIC STOP NUT *6216-8
*6-32	1	90° LONG (100° FLATE) TERMINAL SCREW
*6	19	90° LONG (TYPE 2) STOVE PIPE SCREW
*6	10	90° LONG (TYPE 2) STOVE PIPE SCREW
AN6-5	4	BOLT
AN380-2-4	4	COTTER PIN
AN310-6	4	NUT
B5411	1	SERIAL NUMBER PLACARD
B1761-11	1	PIN
80002-8	2	CLAMP
54603	1	INSTRUMENT PANEL INST.
43012	2	PULLEY INST.
41123-3	2	FABRIC
41331	1	THROTTLE LINK
41541-2	1	THROTTLE CONTROL ASSY.
41542	2	THROTTLE ASSY.
41281	3	CONTROL STICK GRIP
41151	1	SPRING
41131	1	COVER PLATE
41111	1	CRANK
41101	1	ESCUTCHEON PLATE
24175	1	COVERED FUSELAGE ASSY.
10366	1	CUSHION ASSY.
10365	1	CUSHION ASSY.
10364	1	CUSHION ASSY.
10363	1	CUSHION ASSY.
10439	1	SHOCK CORD COVER ASSEMBLY
10250	1	FINISHING INST.
10203	1	ENCLOSURE INST.
PART NO.	QTY.	DESCRIPTION MATERIAL

BOLT'S, SCREW'S, B3901-7
STD. ⊕ ALTHOUS, ADDED
CAP & BASE, CUP ADDED
DIMENSIONS ARE 1000 SERIES-FX
DIMENSIONS ARE JOHN HINETT VOL. 1
EDITION ENGLISH SERIES VOL.
DIMENSIONS ARE STANDARD
NOTE ALSO AS STANDARD
DIMENSIONS ARE IN INCHES
DIMENSIONS ARE IN MILLIMETERS
NOTE

NO.	REVISION	DATE	BY
		9-4-47	RC
		6-2-48	RC
		7-5-49	CLM
		4-25-49	RC
		5-26-49	RC

MODEL PER PLANE SET ASSEMBLY SUPERSEDES SUP. BY

PIPER AIRCRAFT CORP.
LOCK HAVEN, PENNA.

FINISH-PIPER SPECIFICATION #29
MANUFACTURING PRACTICE-PIPER SPECIFICATION 30

FUSELAGE ASSEMBLY (COMPLETE)

SIZE B
DRAWING NO. 23884
SCALE 1/2" = 1"
DRAWN
TRACED
CHECKED
APPROVED
23884

OCT 18 1949
"This drawing is the property of the Piper Aircraft Corp. and is issued in confidence for manufacturing purposes only. It shall not be reproduced, copied, or communicated to others, nor used for any purpose other than that specified, without the written permission of the Piper Aircraft Corp."